



www.erre1.it




www.syby.it

**AUTOMAZIONE
&
INNOVAZIONE**

Industrial Computing Solution

Versioni 26,1



www.erre1.it



Control cabinet Industrial PC

EAGLE-6Dx8 Series (Available with 12th Gen core i3/i5/i7)

■ EAGLE-6xx5 Series (Available with 12th Gen core i3/i5/i7)



Multiple Ethernet Box PC

■ EAGLE-3xx0 Series (Available with J6412 / 11th Gen core i3/i5/i7 / 12th Gen core i3/i5/i7) EAGLE-2xx5-4L Series (Available with J6412 / N95)



EAGLE-TA-B

T

Rugged Fanless Box PC

EAGLE-2xx0 Series (Available with J1900 / J3455)

EAGLE-2xx5 Series (Available with J3455 / J6412 / 11th Gen Core i3/i5/i7&N95)

■ EAGLE-2Dx8 Series (Available with 12th Gen core i3/i5/i7)



Industrial Mini Box PC

■ EAGLE-1xx0 Series (Available with Intel J3455 / J6412)

EAGLE-1xx5 Series (Available with J6412 / 11th Gen core i3/i5/i7)



■ EAGLE-1E10

Intel Elkhart Lake J6412 CPU Processor, 2GbE, 4 USB3.0, 1 HDMI, 1 DP, Mic-in/Line-out, 2 M.2 slot, DC Jack 9 to 36V, PSU

■ EAGLE-2D18 / EAGLE-2D28 / EAGLE-2D38

Intel 12th Gen, Core i3-1215U / Core i5-1235U / Core i7-1255U Processors, 2GbE, 2 USB3.1, 2 USB3C.0, 1 USB-C, 6 COM, 1 HDMI, 1 DP, Mic-in / Line-out, 2 M.2 and 1 Mini-PCIe slot, DC 9 to 36V, PSU

■ EAGLE-3D10 / EAGLE-3D20 / EAGLE-3D30

Intel Alder Lake -U 12th Gen, Core i3-1215U / Core i5-1235U / Core i7-1255U Processors, 5GbE (4 PoE), 4 USB 3.0, 2 USB 2.0, 2 COM, 1 HDMI, 1 VGA, 1 Mini-PCIe slot, DC terminal 9 to 36V, PSU

■ EAGLE-6D15 / EAGLE-6D25 / EAGLE-6D35

Intel Alder Lake -U 12th Gen, Core i3-1215U / Core i5-1235U / Core i7-1255U Processors, 2GbE, 6 USB3.0, 2 USB2.0, 1 HDMI, 1DP, 1 M.2 slot, DC terminal 12/24V, PSU, Cabinet mount rack

EAGLE-PANEL PC

Both Pcap. Touch and Resistive Touch
Full Inventory from 10.1" to 23.8", total 11 choices

Slim Designed Panel PC

- TPC-DCT/DRT Series (11th Gen core i3/i5/i7 | 12th Gen core i3/i5/i7)
- TPC-DCS/DRS Series (Intel J3455 | J6412 | 11th Gen core i3/i5/i7 | N95)
- TPC-DCM/DRM Series (Intel J1900 | J3455)



Full IP66 & IP69K Stainless Steel Panel PC
TPC-SCS/SRS Series (Intel J6412)



Standard 19.0" Rackmount Panel PC

TPC-RCT/RRT Series (11th Gen core i3/i5/i7 | 12th Gen core i3/i5/i7)



Multi Ethernet (PoE) Panel PC

TPC-DCP/DRP Series (Intel J6412 | 11th Gen core i3/i5/i7)
TPC-DCS/DRS -4L Series (Intel J6412 | N95)




Android Touch Panel PCs

TPC-DCS/DRS R Series (Rockchip RA3568)

Rich I/O configured Panel PC

- TPC-PCS/PRS Series (Intel J3455 | J6412 | 11th Gen core i3/i5/i7)
- TPC-PCT/PRT Series (11th Gen core i3/i5/i7 | 12th core i3/i5/i7)
- TPC-PC/PR Series (Intel J1900 | J3455)

Slim designed Panel PC TPC-DCT/DRT Series

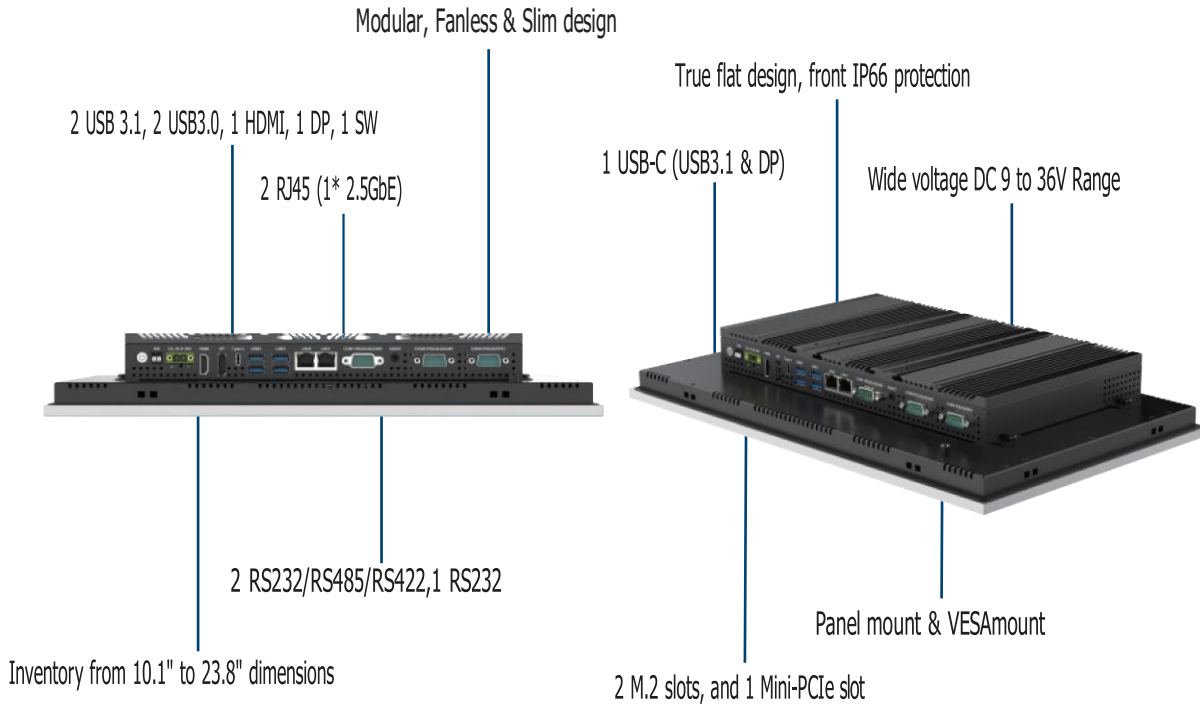

TPC	- DCT	215	D2	
EAGLE Panel PC	Touch Type	Dimension & Resolution	CPU Code	Io & description
EAGLE	DCT (Pcap)	101 (10,1", WXGR 1280*800) 104 (10,4", XGR 1024*768) 12.1 (12,1", XGR 1024*768) 150 (15,0", XGR 1024*768) 156H (15,6", FHD 1920*1080) 170 (17,0", 1XGR 1280*1024)	T1 (i3-1115G4) T2 (i5-1155G7) T3 (i7-1195G7)	2 GbE, 2 U1b3,1, 2 U1b3,0, 1 U1b-C, 2 CoM, 1 HDMI, 1 DP, 1 1W, Rt@io, DC 9 to 36 V
	DRT (Resistive)	185 (18,5", WXGR 1366*768) 185H (18,5", FHD 1920*1080) 190 (1e,0", 1XGR 1280*1024) 215 (21,5", FHD 1920*1080) 238 (23,8", FHD 1920*1080)	D1 (i3-1215U) D2 (i5-1235U) D3 (i7-1255U)	2 RJ45, 2 USB3.1, 2 USB3.0, 1 USB-C, 3 COM, 1 HDMI, 1 DP, 1 W, Audio, DC 9 to 36 V

Rich I/O configured Panel PC TPC-PCS/PRS Series

TPC	- PRS	156H	E1	
EAGLE Panel PC	Touch Type	Dimension & Resolution	CPU Code	IO & Description
EAGLE	PCS (Pcap.)	101 (10,1", WXGA 1280*800) 104 (10,4", XGR 1024*F68) 12,1 (12,1", XGR 1024*F68) 150 (15,0", XGR 1024*F68)	A1 (J3455) E1 (J6412)	2 GbE, 4 USB3.0, 2 USB2.0, 6 COM, 2 HDMI, Audio, DC Terminal 12V, 2 M.2 slots 2 GbE, 8 USB, 6 COM, 2 HDMI, Audio, DC Terminal 12V, 1 Mini-PCle & 1 M.2 slots
	PRS (Resistive)	156H (15,6", FHD 1e20*1080) 1F0 (17,0", 1XGR 1280*1024) 185 (18,5", WXGR 1366*F68) 185H (18,5", FHD 1e20*1080) 1e0 (1e,0", 1XGR 1280*1024) 215 (21,5", FHD 1e20*1080) 238 (23,8", FHD 1e20*1080)	T1 (i3-1115G4) T2 (i5-1155GF) T3 (i7-11e5GF)	2 GbE, 6 USB3.0, 2 USB2.0, 6 COM, 2 HDMI, Audio, DC Terminal 12V, 2 M.2 slots



EAGLE INDUSTRIAL MONITOR


Multiple signal Touch Monitor
 ■ TM-PCA/PRA Series: Panel mount & VESA mount;
 Front IP66 protection; Multiple signal inputs: 1 HDMI, 1 DP, 1 DVI, 1 VGR

Dual signal Touch Monitor
 TM-PC/PR Series: Panel mount & VESA mount;
 Front IP66 protection; Dual signal inputs: 1 DVI, 1 VGA



Multiple signals touch Monitor EAGLE-TA-M-PCA/PRA Series

TM - PCA 215			
EAGLE Monitor	Touch Type	Dimension & Resolution	IO & Description
EAGLE-TA-M	PCA (Pcap)	150 (15,0", XGR 1024*768) 156H (15,6", FHD 1920*1080) 170 (17,0", SXGA 1280*1024) 185 (18,5", WXGA 1366*768)	1 HDMI, 1 DP, 1 DVI, 1 VGA, 1 USB, DC 12V
	PRA (Resistive)	185H (18,5", FHD 1920*1080) 190 (19,0", SXGA 1280*1024) 215 (21,5", FHD 1920*1080) 238 (23,8", FHD 1920*1080)	

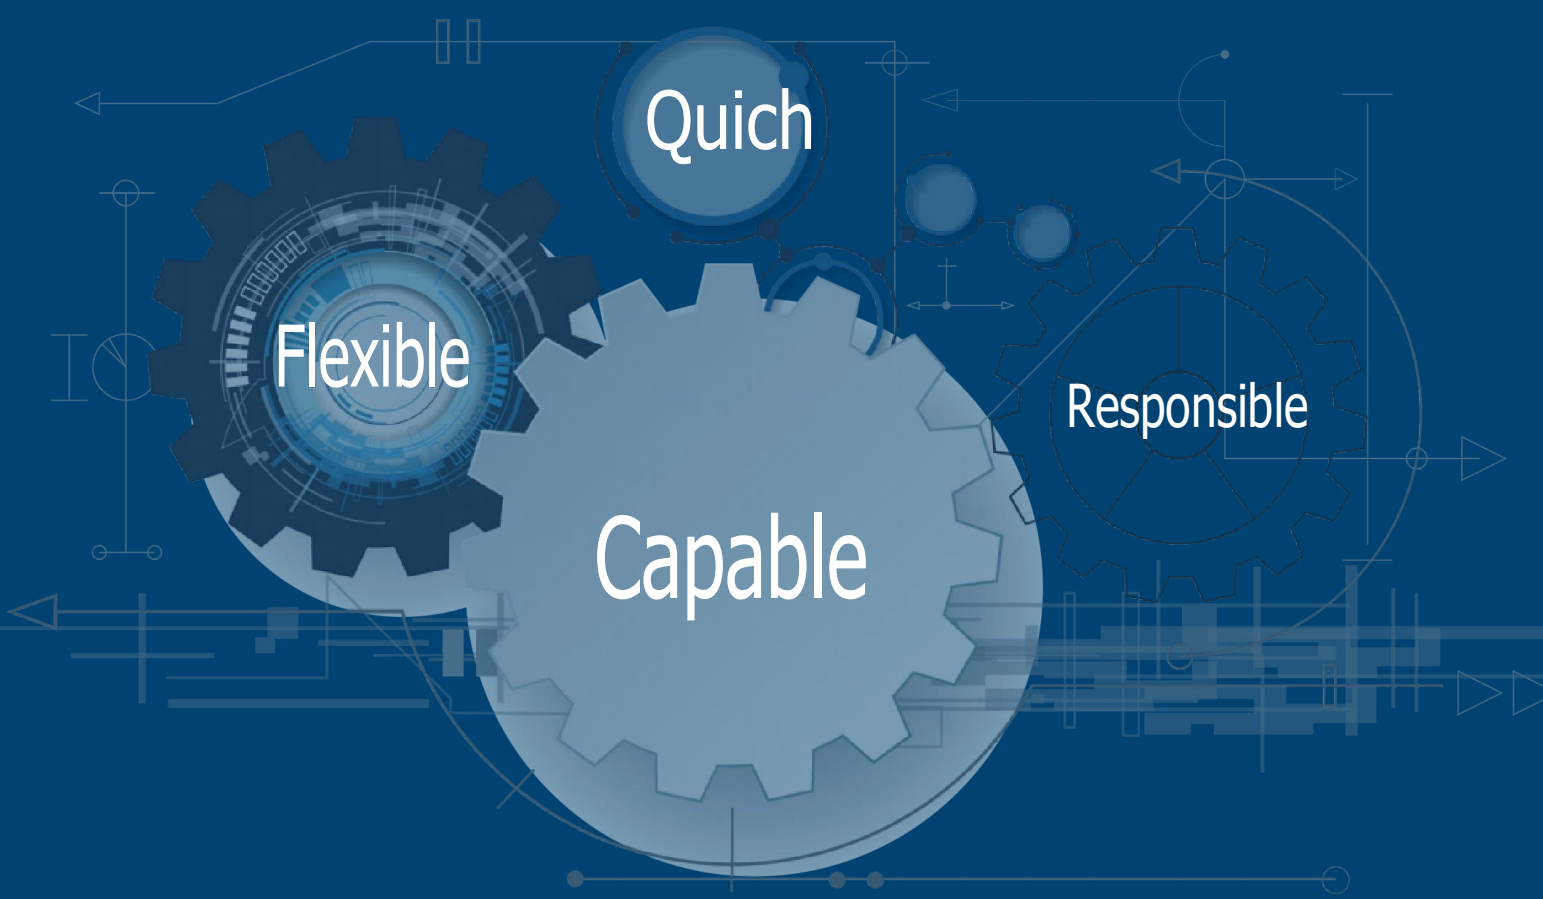

customize service



www.erre1.it